

LADYBUG SPINNING WHEEL


REPLACING THE MOTHER-OF-ALL

TOOLS NEEDED

Phillips screwdriver

REPLACE THE MOTHER-OF-ALL

- Remove the flyer and bobbin and set aside.
- Remove the front maiden and set aside.
- Remove the screw in the slot in the mother-of-all, and remove the barrel nut from the front leg. (On wheels built before 2/12/2012, the screw is on the top of the mother-of-all.)
- Remove the wood wedge on the back of the wheel.
- Pull out the mother-of-all, and insert the new mother-of-all.
- Insert the barrel nut into the hole at the top of the front leg and secure with the screw through the top of the mother-of-all.
- Replace the wood wedge on the back of the wheel.
- Re-install the front maiden, and flyer and bobbin. 🐞

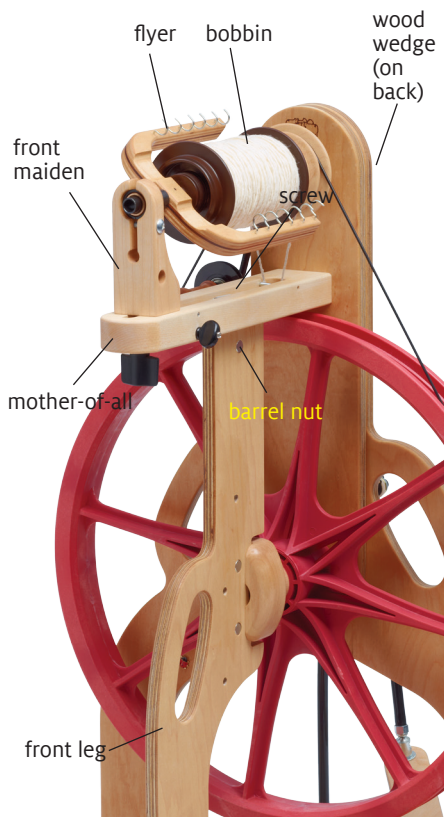

Find out more at schachtspindle.com

Schacht Spindle Company 6101 Ben Place Boulder, CO 80301

p. 303.442.3212 f. 303.447.9273

© 2013 Schacht Spindle Company, Inc.